


## **APPLICATIONS** -

The flexographic printing process demands the maximum of quality on every single used component due to its high technical requirements.

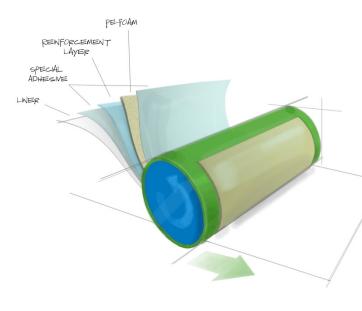

Special requirements are set to cross-linked, closed-cell polyethylene foams as carrier for cliché mounting tapes.

Narrow thickness tolerances and customized compression values are important factors.

TROCELLEN is serving this market with a specifically developed product portfolio and technical support for achieving the best printing results with the harmonized mounting tape hardness grades.

Optionally available with single or both side Corona treatment or long-term stable AST.

## BENEFITS ·

- smooth surface, cross-linked and closed-cell structure:
  - ✓ very good compatibility with different adhesive systems
  - ✓ easy to coat and die-cut
  - ✓ homogeneous cell-distribution and -structure
- flexible and conformable:
  - ✓ optimal resilience behaviour
  - ✓ very good fitting accuracy
  - ✓ excellent force distribution per print dot

## BUSINESS UNIT ADHESIVE TAPES -

For more information please contact our adhesive tapes team:

TROCELLEN GmbH, Mülheimer Strasse 26, 53840 Troisdorf E-mail : tapes@trocellen.com, www.trocellen.com

